

Samson XPD2 Lavalier User Guide

Samson XPD2 Lavalier User Guide *At the bottom of the page in - English, Français, Español, Deutsch, Italiano and Polish:

<https://samsontech.com/products/wireless-systems/xpd-series/xpd2lav/>

Mac Setup/User Video: <https://www.youtube.com/watch?v=VjaY1iY2w7k>
(iPad setup in Mandarin) <https://www.youtube.com/watch?v=SNuCffOel30>

Windows Setup/User Video: <https://www.youtube.com/watch?v=VjaY1iY2w7k>

Windows Setup (MAC OSX Setup below)

Step 1: Remove Samson USB receiver, mini-XLR connector, lavalier, and transmitter




- Plug the USB receiver into a USB port on computer
 - Windows will automatically install the USB driver for that port.



Step 2: Set XPD2 as default input/recording device

- Open the **Control Panel** (you can type it into the left hand lower search bar or find through windows start button at bottom left of screen)

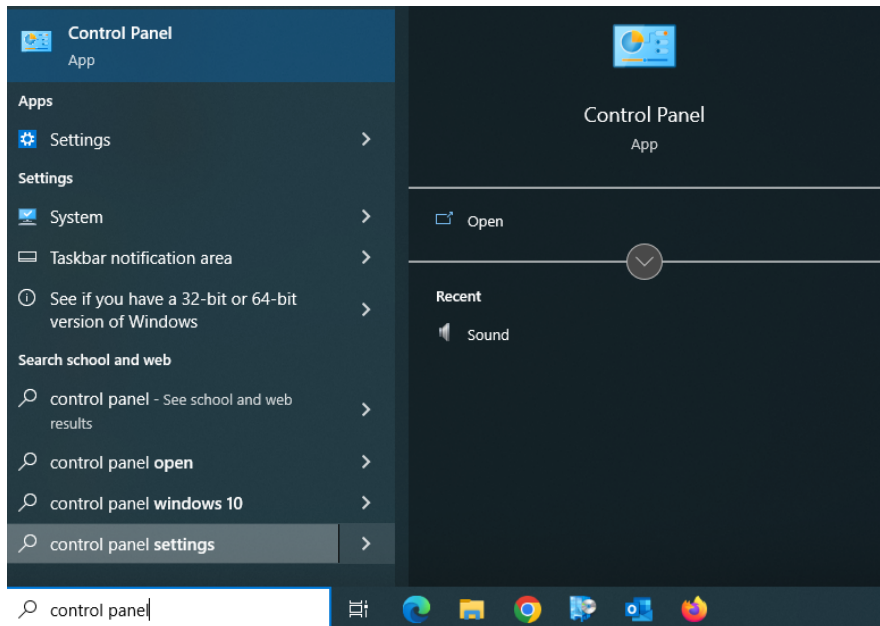

- **Hardware & Sound Settings**



→ then


click **Sound**.



Sound

[Adjust system volume](#) | [Change system sounds](#) | [Manage audio devices](#)

- Under the recording tab, select “**Samson RXD Wireless Receiver**” and press **Set Default** button

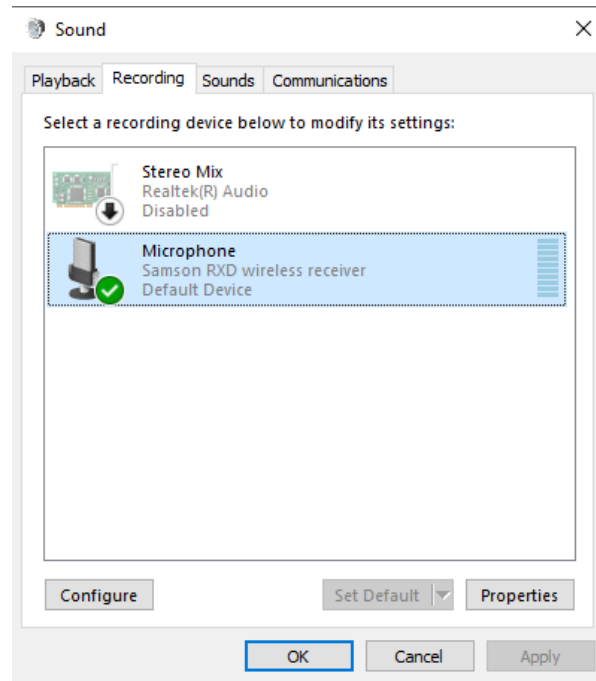


Step 3: Power & Pair

- Power on transmitter and receiver by holding the **Power/Pair** switch
 - LED will turn amber




- First time pairing
 - Both receiver and transmitter should be powered on prior to this step

- Hold **Pair** button on RXD2 receiver for >5 seconds until it begins flashing
- Hold **Power** button on transmitter until both LED lights are solid amber

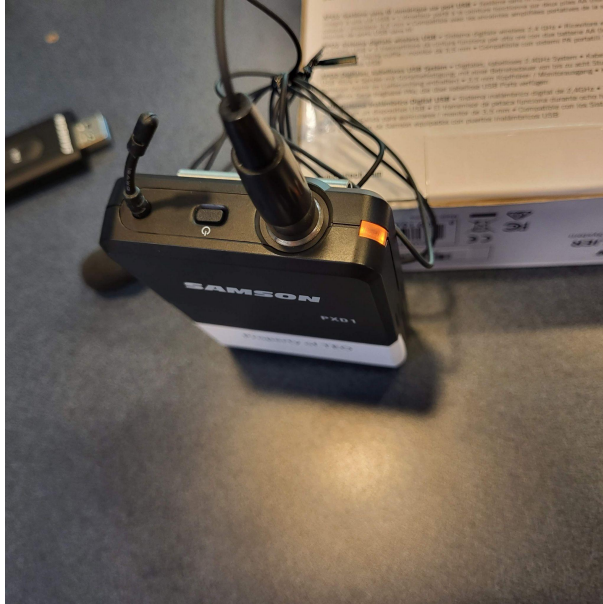

Step 4: Connect provided lavalier mic, Test, and Adjust Gain

- Connect **lavalier mic** to transmitter

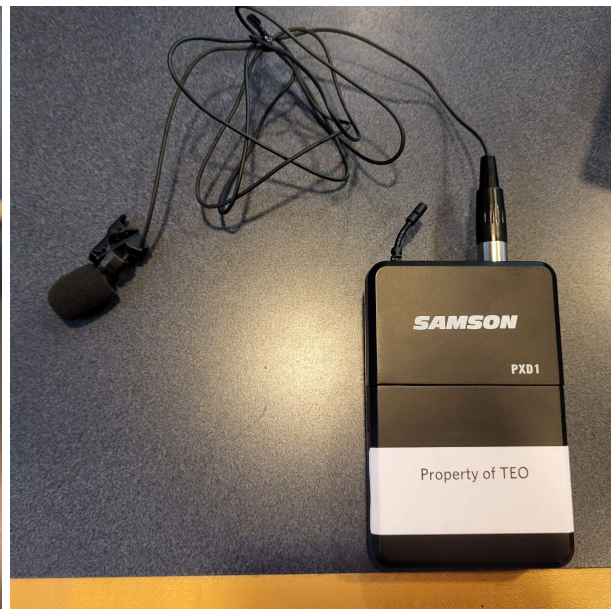

- Speak or sing into mic at a normal level and raise input as needed

- Adjust **Gain** knob **inside** transmitter with provided screwdriver if you hear:
 - **Distortion** - turn gain control counterclockwise until it disappears
 - **Noisy signal** - turn gain control clockwise until it reaches an acceptable level

MAC OSX Setup

Step 1: Remove Samson USB receiver, mini-XLR connector, lavalier, and transmitter

- Plug the USB receiver into a USB port on computer (might need adaptor if no USB port)
 - Windows will automatically install the USB driver for that port.

Step 2: Set XPD2 as default input/recording device

- Open the **System Preferences** from the **dock** or **main Apple menu**
 - Then open **Sound Preferences** → choose **Input tab** → select “**Samson RXD Wireless Receiver**”

Step 3: Power & Pair

- Power on transmitter and receiver by holding the **Power** switch
 - LED will turn amber
- First time pairing
 - Both receiver and transmitter should be powered on prior to this step
 - Hold **Power** button on RXD2 receiver for >5 seconds until it begins flashing
 - Hold **Power** button on transmitter until both LED lights are solid amber

Step 4: Connect provided lapel mic, Test, and Adjust Gain

- Connect **lapel mic** to transmitter
 - Speak or sing into mic at a normal level and raise input as needed
 - Adjust **Gain** knob **inside** transmitter with provided screwdriver if you hear:
 - **Distortion** - turn gain control counterclockwise until it disappears

- **Noisy signal** - turn gain control clockwise until it reaches an acceptable level